


Conductivity Probe FYA641LFP1 / LFL1

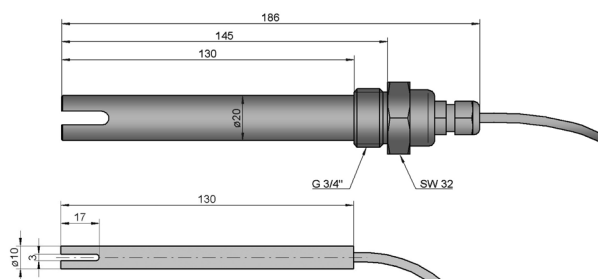

Applications:

Concentrated waste water, aggressive waters, general aqueous and partly aqueous solutions, beer, emulsions, electroplating, waters, concentrated acidic and alkaline solutions, corrosive acids and alkaline solutions, lacquers and paints, substances containing protein, soaps, detergents, suspensions, titrations organic substances, environmental analysis.

Technical Data

Measuring range:	0.01 to 20mS/cm LFL1 up to 10mS/cm	Shaft material:	PVC - C
Temperature sensor:	NTC, type N (10k at 25°C)	Shaft length/shaft diameter:	LFP1: 130mm/20mm LFL1: 130mm/10mm
Temperature compensation:	0 to +70°C, automatic	Fitting length / thread	only LFP1 145 mm / G $\frac{3}{4}$ ''
Compensation coefficient:	1.9 linear	Maximum pressure	LFP1: 16 bar at 25 °C LFL1: not suitable for use under pressure in
Cell constant:	approx. 1cm ⁻¹	Cable length:	1.5m
Electrode material:	special coal	Power supply:	8 to 12V through meas. instr.
Accuracy:	± 3% of meas. val. ± 0.1mS/cm	Current consumption:	approx ca. 3 mA
Nominal temperature:	25°C ± 3°C		
Operating temperature:	-5 to 70°C		
Minimum insertion depth:	30mm		

Accessories

Reference solution 2.77mS/cm at 25°C 0.02mol KCl, 250ml

Order no.

ZB96LFRL

Type (including manufacturer's test certificate)

Active conductivity probe with automatic temperature compensation, Built-in probe, G 3/4" thread, suitable for use under pressure up to 20mS/cm

Laboratory probe, not suitable for use under pressure up to 10mS/cm

Factory calibration KY90xx conductivity for measuring chain (sensor + device) (see chapter Calibration certificates)


Order no.

FYA641LFP1

FYA641LFL1

Water analysis

Conductivity Probe FYA641LFP2 / LFL2

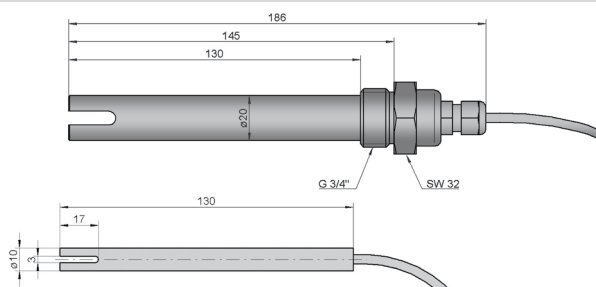

Applications:

Low-salt waste water, general aqueous and partly aqueous solutions, fish tanks, emulsions, desalting/ion exchanger, beverages, waters, cold/boiler feed water, lacquers and paints, milk, samples with low ionic strength, substances containing protein, purest water, soaps, detergents, suspensions, drinking water, environmental analysis.

Technical Data

Measuring range:	10 to 200 μ S/cm
Temperature sensor:	NTC, type N (10k at 25°C)
Temperature compensation:	0 to +70°C, automatic
Compensation coefficient:	1.9 linear
Cell constant:	approx. 1 cm ⁻¹
Electrode material:	special coal
Accuracy:	\pm 3% of meas. val. \pm 1 μ S/cm
Nominal temperature:	25°C \pm 3°C
Operating temperature:	-5 to 70°C
Minimum insertion depth:	30mm

Shaft material:	PVC - C
Shaft length/Shaft diameter:	LFP2: 130mm/20mm LFL2: 130mm/10mm
Fitting length / thread	only LFP2 145 mm / G $\frac{3}{4}$ "
Maximum pressure	LFP2: 16 bar at 25 °C LFL2: not suitable for use under pressure
Cable length:	1.5m
Power supply:	8 to 12V through meas. instr.
Current consumption:	approx. 3 mA

Zubehör

Reference solution 147 μ S/cm at 25°C 0.001mol KCl, 250ml

Order no.

ZB96LFRL2

Type (including manufacturer's test certificate)

Active conductivity probe 0 ... 200 μ S/cm with automatic temperature compensation,

Built-in probe, G $\frac{3}{4}$ " thread, suitable for use under pressure

Laboratory probe, not suitable for use under pressure


Factory calibration KY90xx conductivity for measuring chain (sensor + device) (see chapter Calibration certificates)

Order no.

FYA641LFP2

FYA641LFL2

Conductivity Probe FYA641LFP3

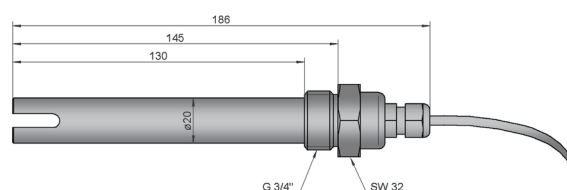

Applications:

Concentrated waste water, aggressive waters, general aqueous and partly aqueous solutions, beer, emulsions, electroplating, waters, concentrated acid and alkaline solutions, corrosive acids and alkaline solutions, lacquers and paints, substances containing protein, soaps, detergents, suspensions, titrations in organic substances, environmental analysis.

Technical Data

Measuring range:	0 to 200 mS/cm
Temperature sensor:	NTC, type N (10k at 25°C)
Cell constant:	approx. 1 cm ⁻¹
Electrode:	4 electrodes, special coal
Accuracy:	\pm 3% of meas. val. \pm 1 mS/cm
Nominal temperature:	25°C \pm 3°C
Operating temperature:	0 to 70°C
Minimum insertion depth:	30mm

Shaft material:	PVC - C
Shaft length:	145mm
Shaft diameter:	20mm
Fitting length / thread	130 mm / G $\frac{3}{4}$ "
Maximum pressure	16 bar at 25 °C
Cable length:	1.5m
Power supply:	8 to 12V through meas. instr.
Current consumption:	approx. 15 mA

Accessories

Reference solution 111.8mS/cm at 25°C 1mol KCl, 250ml

Order no.

ZB96LFRL3

Type (including manufacturer's test certificate)

Conductivity probe 0 ... 200mS/cm without temp. compensation

Factory calibration KY90xx conductivity for measuring chain (sensor + device) (see chapter Calibration certificates)

Order no.

FYA641LFP3